
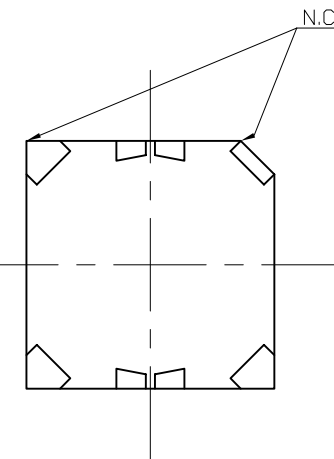
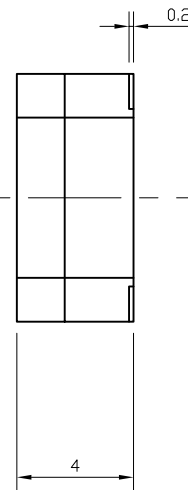
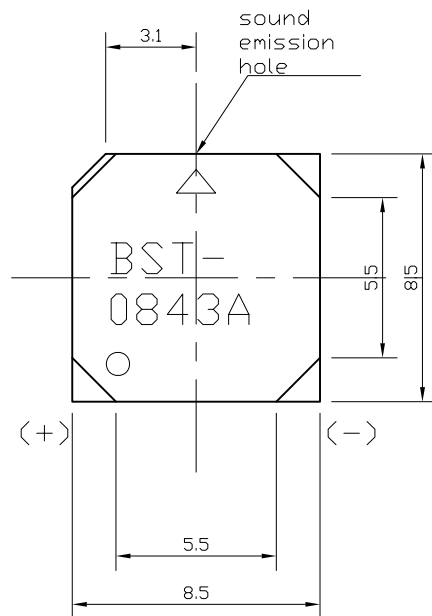


SPECIFICATIONS

| | |
|--------------------------|----------------------------|
| RATED VOLTAGE | 3.6 V _{o-p} |
| OPERATING VOLTAGE RANGE | 2.5 ~ 4.5 V _{o-p} |
| RATED FREQUENCY | 2,700 Hz |
| MAX CURRENT CONSUMPTION | MAX 110 mA |
| COIL RESISTANCE | 16 +/- 3 Ohms |
| MIN. SOUND LEVEL AT 10cm | MIN 85 dBA |
| HOUSING MATERIAL | LCP |
| PLATING MATERIAL | TIN PLATED COPPER |

REVISIONS

| NO. | CONTENTS | DATE | MADE BY |
|-----|-----------------|--------|---------|
| 1 | INITIAL RELEASE | 19 JUN | D.KIM |



***NOTES**

- ALL DIMENSIONS ARE IN MILLIMETERS
- ROHS COMPLIANT
- GENERAL TOLERANCE : 0.3MM

| | | |
|------------------------|--|--|
| SIZE A4 | SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT PRIOR NOTICE | |
| DRAWN BY : S.KIM | DATE JUNE '10 | |
| APPROVED BY : D.KIM | DATE JUNE '10 | |


BOSAN HITECH
 WWW.BOSANHITECH.COM

P/N : BST-0843A
 (SMT MAGNETIC TRANSDUCER)

THIS DRAWING IS PROPERTY OF BOSANHITECH.
 DO NOT DUPLICATE WITHOUT PERMISSION