
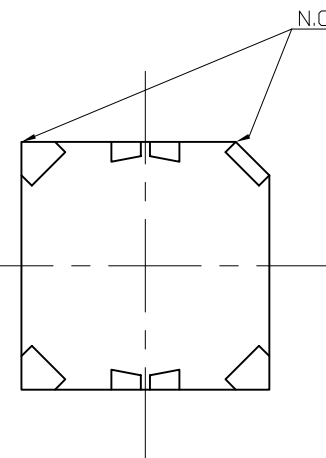
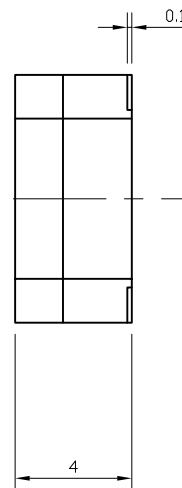
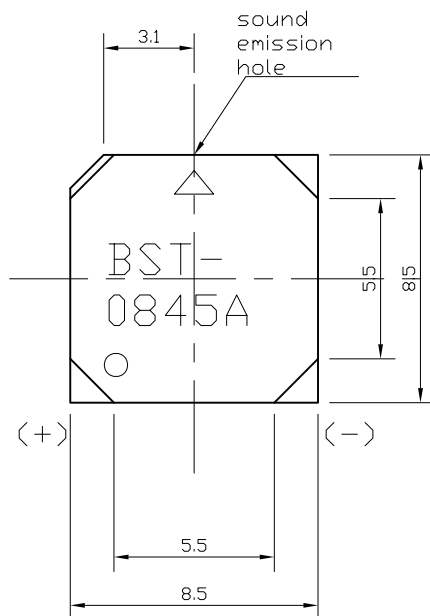


# SPECIFICATIONS

RATED VOLTAGE	5.0 Vo-p
OPERATING VOLTAGE RANGE	4.0 ~ 6.0 Vo-p
RATED FREQUENCY	2,700 Hz
MAX CURRENT CONSUMPTION	MAX 80 mA
COIL RESISTANCE	30 +/- 5 Ohms
MIN. SOUND LEVEL AT 10cm	MIN 85 dBA
HOUSING MATERIAL	LCP
PLATING MATERIAL	TIN PLATED COPPER


# REVISIONS

NO.	CONTENTS	DATE	MADE BY
1	INITIAL RELEASE	19 JUN	D.KIM



**\*NOTES**

- ALL DIMENSIONS ARE IN MILLIMETERS
- ROHS COMPLIANT
- GENERAL TOLERANCE : 0.3MM

SIZE A4	SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT PRIOR NOTICE	 WWW.BOSANHITECH.COM
DRAWN BY : S.KIM	DATE JUNE '10	
APPROVED BY : D.KIM	DATE JUNE '10	P/N : BST-0845A (SMT MAGNETIC TRANSDUCER)
		THIS DRAWING IS PROPERTY OF BOSANHITECH. DO NOT DUPLICATE WITHOUT PERMISSION